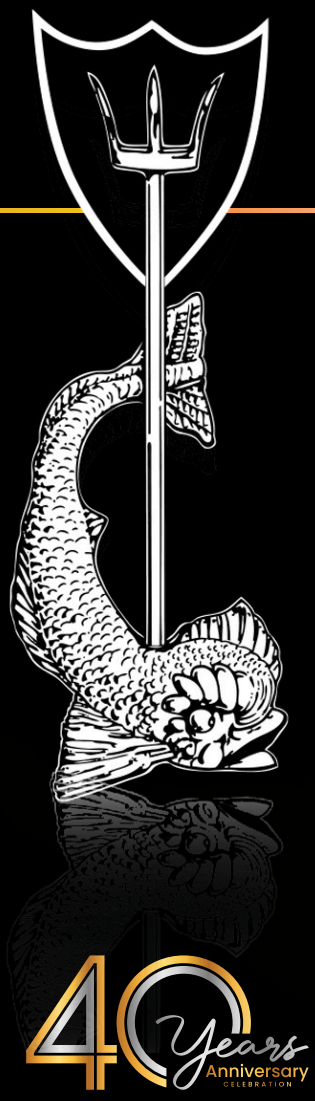
# TRIDENT RUBBER®




## Marine • Automotive • Industrial

# INTERNATIONAL HOSE CATALOG

©TRI 2025 | 22nd EDITION 2025


| PART# - NAME - CERTIFICATIONS<br>WARRANTY - COLOR - FEATURE | DESCRIPTION | I.D. SIZE<br>INCH | <br>mm | PACKAGING |
|---|---|---|---|---|
| **329 TRIDENT A2 CORRUGATED FUEL FILL**<br>USCG • ISO • SAE • NMMA • LLOYD'S • CE<br><br>HEAVY WALL<br>5 YEAR WARRANTY • BLACK WITH RED STRIPE | Trident Corrugated A2 Marine Fuel Hose (Fill and Vent plus Diesel Distribution) meets newest ABYC H-24 and H-33, SAE J1527, SAE J30R6, ISO 7840 A2, USCG Type A2; and is NMMA Type Accepted, CE Certified and Lloyds Approved, for all marine fuels including gasoline, alcohol blends, diesel and bio-diesel. Built with thick wall, corrugated cover and wire helix between 2 ply reinforcement for extra service life and bend-ability. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation. | 1-1/2"<br>2"<br>2-3/8" | 38mm<br>to<br>51mm | Coils:<br>25' (7.6m)<br>50' (15m)<br>Length:<br>12.5' (3.8m)<br>Boxed on request up to 1.5" (38mm) |
| **327/328 TRIDENT A2 FUEL LINE & FILL** USCG • ISO • SAE • NMMA • LLOYD'S • CE<br><br>HEAVY WALL<br>5 YEAR WARRANTY • BLACK WITH RED STRIPE | Trident A2 Marine Fuel Hose (Fill and Vent plus Diesel Distribution) meets newest ABYC H-24 and H-33, SAE J1527, SAE J30R6, ISO 7840 A2, USCG Type A2; and is NMMA Type Accepted, CE Certified and Lloyds Approved, for all marine fuels including gasoline, alcohol blends, diesel and bio-diesel. Built with thick wall, smooth cover and wire helix between 2 ply reinforcement for extra service life and bend-ability. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation. #328 Series is same as #327, but without wire helix. | #327:<br>3/4" to<br>2-3/8"<br>—<br>#328<br>1-1/2"<br>& 2" | 19mm<br>to<br>60mm | Coils:<br>25' (7.6m )<br>50' (15m)<br>Length:<br>12.5' (3.8m)<br>Boxed on request up to 1.5" (38mm) |
| **365 TRIDENT A1-15 FUEL LINE**<br>USCG • ISO • SAE • NMMA • ABYC • CE • EPA • CARB<br><br>5 YEAR WARRANTY • BLACK | Trident Barrier Lined "Low Perm" A1-15 Marine Fuel Hose (Distribution, Return, Vent and Transfer) for all marine fuels including gasoline, alcohol blends (CE-10), diesel and bio-diesel. Meets newest ABYC H-24 and H-33, SAE J1527, CARB and EPA "A1-15" and USCG Type A1, ISO 7840 A1 standards and requirements, and is NMMA type Accepted and CE Certified. Built with 2 spiral reinforcement and unique "Perm Barrier Liner" on inside surface of tube. Formulated for Max resistance to fuels, fire, heat, cold,ozone, aging and permeation. New EPA Certified and CARB Compliant. | 1/4"<br>to<br>3/4" | 6.3mm<br>to<br>19mm | Reels:<br>250' (76m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m)<br>100' (30.5m) |
| **319 TRIDENT A1-15 FUEL LINE**<br>USCG • ISO • SAE • NMMA • ABYC • CE • EPA • CARB<br><br>5 YEAR WARRANTY • BLACK | Trident Barrier Lined "Low Perm" A1-15 Marine Fuel Hose (Distribution, Return, Vent and Transfer) for all marine fuels including gasoline, alcohol blends (CE-10), diesel and bio-diesel. Meets newest ABYC H-24 and H-33, SAE J1527, CARB and EPA "A1-15" and USCG Type A1, ISO 7840 A1 standard and requirements, and is NMMA type Accepted and CE Certified. Built with 2 spiral reinforcement and unique "Perm Barrier Liner" between tube and reinforcement. Formulated for Max resistance to fuels, fire, heat, cold, ozone, aging and permeation. EPA Certified and CARB Compliant. | 1/4"<br>to<br>1/2" | 6.3mm<br>to<br>15mm | Reels:<br>250' (76m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m)<br>100' (30.5m) |
| **317 TRIDENT A2 FUEL VENT**<br>USCG • ISO • SAE • NMMA • ABYC • CE<br><br>5 YEAR WARRANTY • BLACK | Trident New type A2 Marine Fuel Hose (for Vent and Diesel Distribution) for all marine fuels including gasoline, alcohol blends, diesel and bio-diesel. Meets newest ABYC H-24 and H-33, SAE J1527, USCG Type A2, ISO 7840-A2 Standards; and is NMMA Type Accepted and CE Certified. Built with 2 spiral reinforcements and formulated for Max A2 resistance to fuels, fire, heat, cold, ozone, aging and permeation. | 5/8" | 16mm | Reels:<br>250' (76m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m)<br>100' (30.5m) |
| **305 TRIDENT B1-15 OUTBOARD FUEL LINE**<br>USCG • SAE • NMMA • ABYC • CE • EPA • CARB<br><br>3 YEAR WARRANTY • LIGHT GREY | Trident Barrier Lined "Low Perm" B1-15 Marine Outboard Rubber Fuel Line Hose for all marine fuels including gasoline, alcohol blends (CE-10), diesel and bio-diesel. Meets newest ABYC H-24, SAE J1527, USCG, ISO 8469, CARB and EPA standards; and NMMA Type Accepted, CE Certified and EPA Certified. Built with 2 spiral reinforcement, New Ultra Low Perm Barrier Liner, and Light Grey CPE Cover. Formulated for Max resistance to fuels, heat, cold, ozone, abrasion, aging and permeation. New EPA Certificate of Conformity and CARB Executive Order. | 1/4"<br>to<br>3/8" | 6.3mm<br>to<br>9.5mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m)<br>100' (30.5m) |
| **321 TRIDENT OCEAN FLEX MULTI-PURPOSE MARINE HOSE - FUEL/WET EXHAUST/WATER**<br><br>5 YEAR WARRANTY<br>• BLACK W/RED & WHITE STRIPE + BLUE LETTERING | This unique marine hose can be used for a multitude of applications for both Commercial and Recreational Vessels including: Fuel Fill, Feed, and Vent (Diesel & Gasoline – Type A1), Lube Oil, Wet Exhaust, Water (Vital and Non-Vital), Bilge, Coolant, Drains, and Sanitation applications. 2 ply reinforcement with wire helix provides excellent flexibility and bend radius. OCEAN-FLEX boasts compliance with the following standards: USCG Inspected Vessels (Title 46 CFR Sub-Chap. T), SAE J1942 (Code F, VW, NVW), USCG Type A1, SAE J1527 A1 R2, SAE J2006 R2, SAE J20R2 B, SAE J20R4 B, SAE J20R5 B, SAE J30R5, ABYC H-22, H-24, H-33 P-1, P-4, ISO 7840 A1, ISO 8469 B1, and ISO 13363 2B, CE, NMMA. | 1/2"<br>to<br>4"<br><br>Larger on Request | 12.7mm<br>to<br>102mm | Coils:<br>25' (7.6m)<br>50' (15m)<br><br>Lengths:<br>12.5' (3.8m) |
| **221FR PARKER COMMERCIAL FUEL HOSE & FITTINGS**<br>USCG A1 • SAE J1942 • ISO • CE<br><br>7 YEAR WARRANTY • BLUE | Type A1 Marine Fuel Hose for Commercial, Inspected & Recreational Vessels (Distribution, Return, Vent & Transfer) for gasoline, alcohol blends & diesel. Exceeds all USCG, SAE J1942 & 1527 A1, ABYC H24 & H33 Standards; CE Certified; Type Approved by NMMA, Lloyd's, DNV & ABS. Reinforced with 1 braid high tensile steel wire, blue (wipe clean) rubber cover & 2000psi burst pressure. Excellent flexibility. Resistant to all fuels, oil, weather, aging, abrasion, fire, heat, cold & ozone. Required on passenger vessels of 6 passengers or more. Uses Parker (Brass, Steel & Stainless Steel) reusable & crimp on fittings. Assembly and crimping equipment available. | 1/4"<br>5/16"<br>13/32"<br>1/2"<br>5/8"<br>7/8" | 6.3mm<br>7.8mm<br>10mm<br>13mm<br>16mm<br>21mm | Boxed:<br>50' (15m)<br><br>Bulk Reels:<br>350' to 150'<br>(107m to 46m) |

| PART# - NAME - CERTIFICATIONS<br>WARRANTY - COLOR - FEATURE | DESCRIPTION | I.D. SIZE<br>INCH | <br>mm | PACKAGING |
|---|---|---|---|---|
| **252F TRIDENT EXTRA FLEXIBLE CORR MARINE WET EXHAUST HOSE** SAE J2006 • LLOYD'S<br><br>5 YEAR WARRANTY • BLACK W/BLUE, YELLOW & WHITE STRIPE | Trident Extra Flexible Corrugated marine wet exhaust hose made for tight bends. Soft thick rubber tube and cover with wire helix between 2 ply reinforcement. Engineered to be extremely flexible and to have a tight bend radius. Resists heat, ozone, exhaust fumes, panting and collapse. Exceeds (SAE J2006 – R2, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max. continuous | 3/4" to 8" | 19mm to 203mm | I.D. ALL<br>Lengths 6.25'-12.5' (1.9 - 3.8m)<br>Coils: 25' (7.6m)<br>1"- 4" (25.4 - 102mm)<br>Coils 50' (15m) |
| **252 TRIDENT CORR MARINE WET EXHAUST HOSE** SAE J2006 • LLOYD'S<br> **HEAVY WALL**<br>5 YEAR WARRANTY • BLACK WITH BLUE STRIPE | Trident corrugated marine wet exhaust hose for longer connections with substantial bends. Thick tube and cover with wire helix between 2 ply reinforcement. Exceptional flexibility and bend radius. Resists heat, ozone, exhaust fumes, panting and collapse. Exceeds (SAE J2006- R2, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert. 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max.** | 1-1/2" to 8" | 38mm to 203mm | I.D. ALL<br>Lengths 6.25'-12.5' (1.9 - 3.8m)<br>Coils: 25' (7.6m)<br>1"- 4" (25.4 - 102mm)<br>Coils 50' (15m) |
| **250/100 TRIDENT FLEX MARINE WET EXHAUST & WATER** SAE J2006 • LLOYD'S<br> **HEAVY WALL**<br>5 YEAR WARRANTY • BLACK WITH BLUE STRIPE | Trident Flex wet exhaust hose for longer bent connections. In smaller I.D.'s for engine intake, critical water, drain, scupper bilge & sanitation uses. Extra heavy tube and cover with wire helix between 2 ply reinforcement provides excellent flexibility and bend radius. Resists heat, ozone, exhaust, sani chemicals, panting and collapse. Exceeds (SAE J2006-R2, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert. 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max.** | 1/2" to 8" | 13mm to 203mm | I.D. ALL<br>Lengths:<br>6.25' 12.5' 25' - 50'<br>(1.9m-3.8m-7.6m-15m)<br>1/2"- 4" (13 - 102mm)<br>Coils 50' (15m) |
| **200/110 TRIDENT PLY MARINE WET EXHAUST & WATER** SAE J2006 • LLOYD'S<br> **HEAVY WALL**<br>5 YEAR WARRANTY • BLACK W/BLUE STRIPE | Trident Ply marine wet exhaust hose for short, straight connections. In smaller I.D.'s for critical engine coolant & circulation, heat exchanger and discharge uses. Extra heavy tube and cover with 2 to 6 ply reinforcement resists heat, aging, ozone, exhaust and sani chemicals. Exceeds (SAE J2006-R1, and ABYC & NMMA P-1 exhaust standards). Lloyd's Registry Type Approved Cert. 02/00029. Black High Temp EPDM Rubber 250°F (121°C) Max.** | 1/2" to 12" | 13mm to 305mm | I.D. ALL<br>Lengths:<br>6.25' - 12.5'<br>(1.9m - 3.8m)<br>1/2" - 2-1/2"<br>(13 - 63.5mm)<br>Coils: 50' (15m) |
| **252V TRIDENT BLUE CORRA-SIL MARINE WET EXHAUST & WATER** SAE • ISO • LLOYD'S<br> **HEAVY WALL**<br>10 YEAR WARRANTY • GLOSSY BLUE W/ RED TUBE | Trident Blue Corra-sil Corrugated Silicone Marine Wet Exhaust & Water Coolant Hose is the ultimate in flexible exhaust quality with "Real Hot" VHT performance, extra long service life and excellent long length bendability. Exceeds SAE J2006-R2, ISO 13363-2B, and ABYC, & NMMA P-1 exhaust standards and black rubber exhaust features and is Lloyd's Approved. Built with extra thick wall, glossy blue corrugated cover, smooth red tube, wire helix between 2 ply polyester reinforcement and 350°F (177°C) Max. Perfect for long, bent wet exhaust (genset and engine) runs and premium raw water and coolant hose runs. See Marine Wet Exhaust Systems Catalog.** | 3/4" to 8" | 19mm to 203mm | I.D. ALL<br>Lengths 3' - 6' - 12'<br>(0.9 -1.8 - 3.7m)<br>60' (18.3m) Coils avialble in 3/4"- 4" ID<br>(19mm - 102mm) |
| **202X/202V TRIDENT SILICONE MARINE WET EXHAUST & WATER** SAE • ISO • LLOYD'S<br> **HEAVY WALL**<br>10 YEAR WARRANTY<br>#202X BRICK RED • #202V GLOSSY BLUE W/ RED TUBE | Trident Silicone Marine Wet Exhaust & Water-Coolant Hose is the ultimate in extra thick soft wall silicone quality with very high temp. performance and extra long service life. Exceeds SAE J2006-R1, ISO 13363-1B, Lloyd's Registry Type Approved, and ABYC & NMMA P-1 exhaust standards. #202V Glossy Blue "Very Hi Temp" has 4-6 ply polyester reinforcement and 350°F (177°C) Max. #202X Glossy Red "Xtra Hi Temp" has 4 ply Nomex® reinforcement, and 500°F (260°C)Max. Used world wide on premium boats, yachts and special service vessels. It has become the super yacht standard. See Trident Marine Wet Exhaust System Catalog.** | 1" to 18" | 25.4mm to 457mm | I.D. ALL<br>Lengths:<br>3' - 6' - 12'<br>(0.9 -1.8 - 3.7m) |
| **TRIDENT SILICONE & RUBBER WET EXHAUST ELBOWS & BELOWS** SAE J2006<br><br>5-10 YR WRNTY • BLACK (EPDM), BLUE OR BRICK RED | Trident Silicone & Rubber Elbows & Hump Hose Bellows provide the ultimate flexible connectors for Marine Wet Exhaust Systems. They offer much greater tolerance to heat, misalignment, engine movement & vibration, with significant savings in cost, parts, labor and space. Highest max. continuous operating temps - Molded Black Hi Temp EPDM Rubber 280°F (138°C), Blue Very Hi Temp. Silicone 350°F (177°C), Red Xtra Hi Temp. Silicone 500°F (260°C). Silicone (Blue and Red), also available w/ 4 to 6 ply reinforcement. All exceed (SAE J2006-R3, and ABYC & NMMA P1) Std. See Marine Wet Exhaust Systems Catalog.** | 1-1/2" to 18" | 38mm to 457mm | Bulk or boxed with 4 Stainless Steel T-bolt Clamps |

MARINE WET EXHAUST & WATER



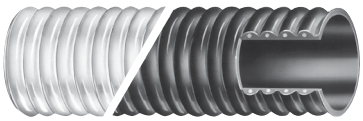
SANITATION

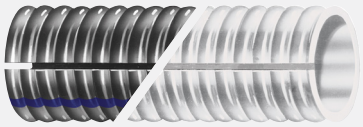
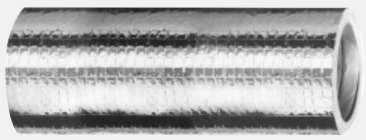

POTABLE WATER

| PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE | DESCRIPTION | I.D. SIZE INCH | I.D. SIZE mm | PACKAGING |
|---|---|---|---|---|
| **TRS SERIES - TRIDENT REDUCER SLEEVE**<br><br>NEW<br>5 YEAR WARRANTY | Trident's reducer sleeve allows you to reduce your ID for those applications that call for 2 different ID sizes. The reducer slides into one of your elbows or bellows, giving you the appropriate size you need. Made from EPDM rubber makes this hose perfect to use with elbows and bellows that do not exceed 250°F. All hoses reduce from ½" of an inch to 1" inch at maximum. | 2" to 8" | 51mm to 203mm | 1 Piece per Box |
| **260 SERIES TRIDENT FIBERGLASS SPLICERS**<br><br>NEW<br>5 YEAR WARRANTY | Our fiberglass splicers are corrosion-resistant high temperature exhaust tubing designed specifically to minimize exhaust gas and cooling water flow restrictions on wet exhaust systems. Precise outside diameters facilitate perfect connections between sections of tubing and flexible joints or hoses. Self – extinguishing per ASTM-D-635, UL94V-O, and the US Navy/USCG MIL-R-21607 and MIL-R-7575. | 2" to 18" | 51mm to 457mm | 1 Piece per Box |
| **130/131V TRIDENT SILICONE & RUBBER HEATER HOSE** SAE J20R3<br><br>2-7 YEAR WARRANTY<br>130 BLACK • 131V - BLUE COVER, RED TUBE | #130 (Standard Black) 50 PSI (0.34 Mpa) W.P. 212°F (100° C) SAE J20R3. 2 Year Warranty.<br><br>131V Ultimate Silicone heater hose - Very Hi Temp Blue with Red Tube provides much greater Temp. range and service life than standard EPDM rubber #130 Heater Hose. Both are 2 spiral polyester reinforced with similar working pressure for engine coolant water, A/C and other mid-press water applications. 131V (VHT-Blue), 45 to 75 PSI (0.31 to 0.52 Mpa) WP 350°F (177°C) SAE J20R3, Class 1 & J20 P3. 7 Year Warranty. | 130: 1/2" to 3/4"<br><br>131V: 1/4" to 1" | 130: 13 to 19mm<br><br>131V: 6.3 to 25mm | Coils:<br>175' - 300' (53 - 90m)<br>Boxed:<br>25' - 50' (7.6m - 15m)<br><br>Reels:<br>250' (76m)<br>Boxed:<br>50' (15m) |
| **132/134 H.D. & X.H.D. WATER / AIR HOSE**<br>SAE J20R3<br><br>2-3 YEAR WARRANTY • BLACK | Cost effective, Hi Temp, EPDM rubber, polyester reinforced and exceeds SAE J20R3. Both are resistant to coolants, ozone, cold & heat; and serve a variety of boat and plant pressurized application (water & air delivery) #132 is 2 spiral, 200PSI (1.38Mpa) W.P. #134 has 4 spiral, heavy wall and better bend radius and working pressure. 300 PSI (2.1Mpa) W.P. Operating Temp. -40°F to 212°F (-40°C to 100°C) #134 serves below water line intake and discharge applications (A/C, Eng, Sani) etc. | 1/4" to 1-1/2" | 6.3mm | Reels:<br>250'-750' (75 -230 m)<br><br>Boxed:<br>50' (15m) |
| **102/101 TRIDENT SANI SHIELD SANITATION HOSE**<br><br><br>HEAVY WALL<br>10 YEAR WARRANTY<br>#102 WHITE W/ GREEN STRIPE • #101 BLACK W/ GREEN STRIPE | Premium Sanitation Hose for all head & holding tank connections. Extra thick tube & cover is specially formulated Black or White EPDM Rubber for Max. Resistance to Odor Permeation and winterizing with antifreeze. With wire helix between 2 ply reinforcement this hose has excellent bend radius, flexibility, and fitting acceptance and retention. This makes for easy installations with no heat gun or lubricant necessary. It's Legendary odor-free performance is the best on the market. Self draining installations still recommended. Not for potable water. | White 3/4" 1" 1-1/2" 2"<br><br>Black 1" 1-1/2" | White 19mm 25mm 38mm 51mm<br><br>Black 25mm 38mm" | Coils:<br>25" (7.6m)<br>50' (15m)<br><br>Length:<br>12.5' (3.8m) |
| **148 TRIDENT VAC X.H.D. SANITATION HOSE - FDA**<br><br><br>3 YEAR WARRANTY • WHITE | Extra heavy duty sanitation hose of smooth white vinyl. Specially compounded to provide resistance to odor permeation and (FDA) potable water fill. Also for critical bilge, drain scupper, live well, etc. Hard PVC helix gives good flexibility and bend radius. No cuffs required.* Don't use with alcohols, anti freeze, petro-chemicals or solvents. Self draining installations are necessary for odor free service. To be used in open ended pressurized, suction, and discharge applications at ambient temperatures. +10° to +120° F (-12° to +49°C). CA prop 65 Compliant. | 5/8" to 2" | 16mm to 51mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m) |
| **150 TRIDENT CLEAR PVC TUBING - FDA**<br><br>2 YEAR WARRANTY • CLEAR PVC | Non-toxic FDA compounded PVC for many unpressurized, cool water uses like fresh water, drain and vent lines. Operating temperatures +20° to +150° F (-7° to +66°C). NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. CA prop 65 Compliant. | 1/4" to 1-1/2" | 6.3mm to 38mm | Coils:<br>250' to 1" (76-25m)<br>100' to 1-1/2" (30.5m-38mm)<br>Boxed: 25' (7.6m)<br>50' (15m)<br>100' (30.5m) |

POTABLE WATER

BILGE & LIVE WELL & DRAIN

| PART# - NAME - CERTIFICATIONS WARRANTY - COLOR - FEATURE | DESCRIPTION | I.D. SIZE INCH | I.D. SIZE mm | PACKAGING |
|---|---|---|---|---|
| **164/162 TRIDENT REINFORCED PVC - FDA**<br><br>2 YEAR WARRANTY • #164 WHITE W/ BLUE TRACER • #162 CLEAR W/ BLUE & RED TRACER | Nylon reinforced. FDA compounded PVC for pressurized drinking water systems, etc. No taste or odor. #164 "Cold Water". Max W.P. depending on I.D. size @ 70°F (21°C):<br>#162=175 PSI (1.21Mpa),<br>Operating temperatures +20° to +150° F (-7° to +66°C).<br>NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. CA prop 65 Compliant. | 3/8" to 1" | 9.5mm to 25.4mm | Coils:<br>250' (76m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m) |
| **165/166 TRIDENT REINFORCED PVC - FDA**<br><br>3 YEAR WARRANTY • #165 - TRANSLUCENT BLUE<br>#166 - TRANSLUCENT RED | Nylon reinforced. FDA compounded PVC for pressurized drinking water systems, etc. No taste or odor. #165 "Cold Water". Max W.P> depending on I.D. size @70˚F (21˚C):<br>#165 = 175 PSI (1.21Mpa),<br>#166 = 150 PSI (1.03 Mpa). Operating temperatures +20˚ to 150˚ F (-7˚ to +66˚C).<br>NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. CA prop 65 Compliant. | 3/8" to 1" | 9.5mm to 25.4mm | Coils:<br>250' (76m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m) |
| **161 TRIDENT HD w/ NYLON REINFORCEMENT PVC - FDA**<br><br>3 YEAR WARRANTY • CLEAR W/NYLON REINFORCEMENT | Heavy duty non-toxic FDA compounded PVC with nylon reinforcement. For pressurized drinking water systems and many other uses. Resists odor, taste and up to 250 PSI/WP (depending on I.D. size) @ 70°F (21°C). For cold and hot tap water. Operating temperatures +20° to +150°F. (-7° to +66°C) Good flexibility and bend radius.* CA prop 65 Compliant. | 1/4" to 1-1/2" | 6.3mm to 38mm | Coils:<br>1/4" - 1" ID - 250'<br>1-1/2" ID - 100'<br><br>Boxed:<br>50' (15m) |
| **163 TRIDENT CLEAR W/ WIRE HELIX PVC HOSE - FDA**<br><br>3 YEAR WARRANTY • CLEAR W/ WIRE HELIX | Premium Clear FDA grade PVC hose with galvanized steel helix provides excellent flexibility and bend radius. It has a smooth outer surface to allow for easy clamping. Liquid suction lines, Air & Water Supply, Food and Beverage Supply, Vacuum Pumps, Bilge, Live Well, Drain, and Potable Water for unpressurized systems. Temperature Range: -5°F to 150°F (-20ºC to 65ºC). | 1/2" to 1-1/2" | 13mm to 38mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>25' (7.6m)<br>50' (15m) |
| **160 TRIDENT SUCTION AND PRESSURE HOSE (FDA)** NEW<br><br>3 YEAR WARRANTY • CLEAR W/ WIRE & REINFORCEMENT | Premium Clear FDA grade PVC hose with galvanized steel helix and high tensile synthetic textile reinforcement provides excellent flexibility and bend radius. It has a smooth outer surface to allow for easy clamping. Liquid suction and pressure lines, Air & Water Supply, Food and Beverage Supply, Vacuum Pumps, Bilge, Live Well, Drain, and Potable Water. -5°F to 150°F (-20°C to 65°C). | 1/2" to 1-1/4" | 13mm to 32mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>50' (15m)<br>100' (30.5m) |
| **146/144 TRIDENT VAC-H.D. WATER FILL & G.P./BILGE & LIVE WELL**<br><br>2 YR WRNTY • #146 WHITE •#144 CLEAR W/ BLACK HELIX | Corrugated heavy wall vinyl hose with smooth tube. FDA compounds for potable water fill, holding tank pump out, bilge, drain, scupper lines and live well use. Hard PVC helix gives exceptional flexibility & bend radius. NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. (No cuffs required but may use #143 RHT cuffs on #146 series). To be used on open ended pressurized, suction, and discharge applications at ambient temperatures. +10° to +120°F (-12ºC to + 49ºC). CA prop 65 Compliant. | 5/8" to 1-1/2" | 16mm to 38mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>50' (15m) |
| **149/147 TRIDENT VAC - X.H.D. BILGE & LIVE WELL HOSE**<br><br>3 YR WRNTY • #149 BLACK•#147 CLEAR W/ BLACK HELIX | Smooth extra heavy wall vinyl hose. 147 is all clear (FDA) with black helix. Excellent durability, flexibility & bend radius for XHD bilge, live well, drain, scupper lines, etc. No cuffs required. To be used in open ended pressurized, suction, and discharge applications at ambient temperatures. +10° to +120° F (-12° to +49°C). CA prop 65 Compliant.<br>149-Black–"Extra Flexible" | 5/8" to 1-1/2" | 16mm to 38mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>50' (15m) |
| **121/120 TRIDENT BILGE HOSE**<br><br>1 YEAR WARRANTY • #121 BLACK • #120 WHITE | Extremely flexible corrugated polyethylene hose for bilge intake and discharge. Cuffed every foot for clamping. Resists oily bilge and sea water. NOT RECOMMENDED FOR BELOW WATERLINE THRU-HULL CONNECTIONS. Operating temperatures -40° to +200° F (-40° to +93°C). | 5/8" to 1-1/2" | 16mm to 38mm | Coils:<br>100' (30.5m)<br><br>Boxed:<br>50' (15m) |

| PART# - NAME - CERTIFICATIONS<br>WARRANTY - COLOR - FEATURE | DESCRIPTION | I.D. SIZE<br>INCH | <br>mm | PACKAGING |
|---|---|---|---|---|
| **CONDUIT**<br>**128/128W TRIDENT WIRE HARNESS CONDUIT**<br><br>1 YR WRNTY • #128 BLACK W/ BLUE STRIPE • #128W WHITE | Corrugated Polypropylene Conduit Hose. Safe and easy to install for multi-wire harness, cable & hose routing, and other applications. ABYC Electrical Standard E-11 applies to all boats with AC or DC systems.<br><br>Slit or Unslit. Fire Retardant/Self Extinguishing Polypropylene. Meets UL 94 V-2 as per ABYC E-11.16.4.1.9. 128W-White for easier location of wiring short circuit burn out. | 1/4" to 2" | 6.3mm to 51mm | Bulk Box:<br>150' to 1000'<br>(46m - 305m)<br><br>Boxed:<br>50' (15m) |
| **129/142 TRIDENT STERN FLEX AND FLANGE**<br><br>3 YR WRNTY • #129 BLACK • #129W WHITE (NOT SHOWN) | Stern Flex Hose for containment of wire, control cables and hoses between the transom and outboard engine(s). Highly resistance to crushing, abrasion, UV and has a good resistance to chemicals.<br>Extraordinary flexibility. Connects to Trident flange part #142-2000 - BLACK or #142W-2000 - WHITE. | 2" | 51mm | Coils:<br>50' (15m)<br><br>4' Kit Boxed w/Flange<br>10' Kit Boxed w/Flange<br>Flanges: Each |
| **VENT DUCT**<br>**402/400 TRIDENT PVC VENT DUCT**<br><br>1 YEAR WARRANTY • #402 BLACK • #400 WHITE | Wire supported vinyl ducting resists weather, sunlight and ozone. Won't support flame.<br>402/400 - Stand. vent ducting 3 mil.<br>Operating temperatures 0° to +160°F (-18° to +71°C). | 3" & 4" | 76mm to 102mm | Boxed:<br>50' (15m) |
| **BLOWER**<br>**481 TRIDENT POLYDUCT**<br><br>3 YEAR WARRANTY • BLUE | Polyduct – The most flexible, crush proof and rugged blower duct hose for Heat, Ventilation and Air Conditioning (HVAC). Heavy Duty polypropylene hose, reinforced with a flexible polypropylene rod helix. It has excellent flexibility & compressibility; and excellent resistance to crushing, flex fatigue, tearing, and moisture . Stomp on it and it returns to shape without damage. Shove it thru tight openings and overheads and it delivers full air flow. Meets FMVSS 302 flame resistance, Temp. Range: -40°F to +225°F (-40°C to 107°C). **when insulated* | 1" to 8" | 25mm to 203mm | Lengths Boxed:<br>50' (15m) |
| **A/C DUCT**<br>**471 TRIDENT INSULATED AIR CONDITIONING DUCT**<br><br>2 YEAR WARRANTY • SILVER | Thermo-efficient insulated Heating & A/C Duct. #471 has fiberglass reinforced metalized cover. Rated R-4.2. Operating temperatures (-20° - +250° F) (-29° to +121°C). Meets UL 181, NFPA 90A and 90B. | 3" to 8" | 102mm to 203mm | Lengths Boxed:<br>25' (7.6m) |
| **A/C HOSE**<br>**169 TRIDENT A/C HOSE** 2 YEAR WARRANTY • WHITE<br> | Smooth white cover reinforced with polyester for chiller and drain lines. Suited for use in air conditioning systems. Temperature Range: -40F to 150°F (-40°C to 65°C). | 5/8" | 16mm | Coils:<br>300' (91.4m)<br><br>Boxed:<br>50' (15m) |
| **STEERING**<br>**MSH TRIDENT STEERING HOSE**<br><br>1 YEAR WARRANTY • BLACK | Marine Steering Hose - 1000 PSI Working Pressure - Low Volumetric Expansion. Polymeric core tube, fiber braid reinforcement, abrasion resistant urethane cover. Black, non-perforated cover, all layers bonded for optimum kink resistance & flexibility. -40°F. to +212°F. (-40°C. to +100°C) except limited to +135°F. (+57°C.) for synthetic hydraulic fluids & water based fluids. Uses MS Series Brass Swaged, Crimped On or Reusable Fittings. | 5/16" & 3/8" | 7.8mm & 9.5mm | Boxed:<br>50' (15m)<br>100' (30.5m)<br><br>Bulk Reel:<br>600' (183m) |
| **SPEEDOMETER**<br>**151 TRIDENT SPEEDOMETER PITOT TUBING**<br><br>1 YEAR WARRANTY • BLACK | Black PVC tubing for connection between the speedometer pickup and the gauge. Series 151 has 2-Spiral Polyester Plies reinforcement for high-speed applications and maximum flexibility. Temperature Range: -20°F to 212°F (-28ºC to 100ºC) | 1/8" | 3.17mm | Coils:<br>1200'(365.8m)<br><br>Boxed:<br>25'(7.6m)<br>100'(30.5m) |

| PART# - NAME - CERTIFICATIONS<br>WARRANTY - COLOR - FEATURE | DESCRIPTION | I.D. SIZE<br>INCH | <br>mm | PACKAGING |
|---|---|---|---|---|
| **WASH DOWN** | | | | |
| **167 COILED WASH DOWN HOSE**<br><br>NEW<br>3 YEAR WARRANTY • BLACK WITH WHITE STRIPE | Coiled Wash Down Hose is constructed with FDA grade PVC extrusion allowing it to stretch out and automatically coil back into its original form. With heavy-duty wall, it ensures maximum kink resistance and long life. Trident's Coiled Wash Down Hose offers long lasting flexibility and superior abrasion resistance. Complete with solid brass fittings that are built to last without leakage. 3 year warranty. | 3/8" | 9mm | Lengths:<br>15' (4m )<br>25' (7.6m)<br>50' ( 15m ) |
| **168W/168Y TRIDENT WASH DOWN HOSE**<br><br>NEW<br>5 YEAR WARRANTY • #168W WHITE • #168Y YELLOW | Trident Wash Down Hose is constructed with a white FDA grade PVC tube and cover. With heavy-duty 3-ply reinforcement, it ensures maximum kink resistance and long life. Trident Wash Down Hose offers long lasting flexibility and superior abrasion resistance. Fittings are not included. 5 year warranty | 5/8"<br>&<br>3/4" | 16mm<br>to<br>19mm | Lengths:<br>82' (25m)<br>164' (50m) |
| **168 TRIDENT WASH DOWN HOSE**<br><br>3 YEAR WARRANTY • WHITE WITH BRASS FITTINGS | Wash Down Hose is constructed with an FDA grade vinyl tube and clear vinyl cover. With heavy-duty 2-ply reinforcement, it ensures kink resistance and long life. Trident Wash Down Hose offers long lasting flexibility and superior abrasion resistance. Complete with solid brass fittings that are built to last. This hose is primarily used for dockside wash down and water connections. Temperature Range: -20°F to 150°F (-28.9ºC to 65.6ºC). | 5/8" | 16mm | Coils:<br>25' (7.6m)<br>50' (15m)<br>75' (22.8m)<br>100' (30.5m) |
| **RESIN INFUSION** | | | | |
| **180 TRIDENT LDPE TUBING**<br><br>NEW<br>1 YEAR WARRANTY FOR NON-RESIN USAGES • OPAQUE WHITE | Trident LDPE hose is made from 100% virgin low-density polyethylene resin, offering additional flexibility without sacrificing inertness. With it's mirror-like smooth interior surface it has a higher flow rate making it a great metal tubing alternative. Primarily used for resin infusion for molds, this hose has a max pressure rating of 135psi and is FDA approved for food and beverages. | 3/8"<br>&<br>1/2" | 9mm<br><br>15mm | Coils:<br>300'<br><br>Boxed:<br>50' (15m)<br>100' (30.5m) |
| **TURBO** | | | | |
| **TS TURBO/AIR COOLER HOSE**<br><br><br>NEW<br>5 YEAR WARRANTY • MATTE BLUE W/ BLACK TUBE | TURBO Silicone is designed to handle the extreme. With 3 and 4 ply reinforcement, a high temp silicone cover and black Fluorosilicone inner tube for best resistance to gases and oil for extended periods. The perfect flexible connection for between the charger and air cooler system. High temp silicone cover with a Fluorosilicone tube Color: Matte blue with black tube. | 2"<br>to<br>4.5" | 51mm<br>to<br>114mm | Lengths:<br>3' .914m |
| **CLAMPS** | | | | |
| **720/730 STAINLESS STEEL T-BOLT EXHAUST CLAMPS & CONSTANT TORQUE CLAMPS**<br><br>SOLID STAINLESS STEEL | Trident T-Bolt Clamps: 3/4" (19mm) Wide, 316 Stainless Steel band & 18-8 Stainless Steel TBolt & Lock Nut (with nylon insert). Very strong and secure for critical applications. Constant Torque Clamps: 304 Stainless Steel 5/8" (16mm) wide band, liner, housing; 18-8 Stainless Steel screw and 301 Stainless Steel Bellville Springs. 7/8" (22mm) OD Range. Automatically expands and contracts to compensate for heat, cold & compression set. | 1/2"<br>to<br>18" | 9mm<br>to<br>457mm | Bulk as Required<br>Box: 10 |
| **705/710 STAINLESS STEEL HD NON-PERF CLAMPS**<br><br>316 STAINLESS STEEL | Premium Marine Grade, all 316 (high tensile strength) Stainless Steel "HD NON-PERF" Worm Gear Hose Clamp. Band is Non-Perforated and Smooth on the inside w/ Rolled Edges eliminates hose damage with increased clamping force. The Compact, One Piece Housing provides one of the highest clamping force ratings of any worm gear style clamp. Screw Head is 7mm. 705 series: 9.7 mm (0.382") wide band and 14mm (0.55") wide housing. 710 series: 11.7 mm (0.46") wide band and 16mm (0.63") wide housing. | 705:<br>1/4" to<br>1-1/2"<br><br>710:<br>1/2" to<br>8" | 705:<br>8 to<br>56mm<br><br>710:<br>15 to<br>231mm | Bulk as Required<br>Box: 10 |
| **FITTINGS** | | | | |
| **500/600/700 BRASS HOSE FITTINGS, FERRULES & ADAPTERS**<br><br>BRASS | Solid brass Standard Hose Fittings, Ferrules & Pipe Adapters stocked in all fuel hose sizes. Crimpers and dies are available. For complete detail, see our retail price list. To be used with 305, 365, 319 and 317 Series Fuel Hoses; and 130, 131V, 132, 134 Series Water Hoses. | See<br>Retail<br>Price<br>List | See<br>Retail<br>Price<br>List | Bulk:<br>100 Each<br><br>Carton:<br>10 Each |

AUTOMOTIVE
- EPDM Heater hoses
- Turbo Hoses with Flourosilicone
- Elbows & Bellow Connectors
- Silicone or EPDM Rubber

INDUSTRIAL
- Hoses for many industrial applications

MARINE
- Fuel Hoses
- Wet Exhaust
- Sanitation
- Silcone Elbows & Bellows
- FDA Drinking Hoses
- SOOO MUCH MORE

**LOOKING for CUSTOM SILICONE & RUBBER PARTS?**

We make custom parts. From a CAD file - to sample - to production, we do it all!

Contact Sales Now
1.800.414.BOAT






A TRIDENT EXCLUSIVE

**Self-dispensing Reel Boxes w/ Color Coded Icon Labeling**
Hose dispenses smoothly and tangle-free

# TRIDENT RUBBER®

585 Plum Run Road | Canonsburg, PA 15317

**1-800-414-BOAT**

Phone: 1(724) 745-9311
Fax: 1(724) 745-1709
Web: tridentmarine.com
Email: trident@tridentmarine.com

40 Years Anniversary CELEBRATION